

AGM 60

GM
Mecc Alte
D+&



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$#/(#

! ž \$ < nž 7 cg 1 \$ž

	"	"	"	"	
400/230	62.00	50.00	56.00	45.00	81.00

fP GDŁ

GC ;) &

fDF DŁ

GC ;) & ž

%\$!

%

%&

ž& GC " \$(**

Standart Specification

- Heavy duty, water cooled naturalgas engine
- 46/50 °C ambient rated radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation

1

ENGINE

!

ALTERNATOR

!

WISE ACCESSORIES

!

CONTROL SYSTEM

!

AGM 60

GM
Mecc Alte
D+&

Manufacturer	GM	
Model	857	
	1500 d/dk) *"\$ "Q-DQ
	L	5.7000
		102 x 88
		9,4:1
	fl # L	rpm
		1500
Fuel Consumption	m ³ /h.	17
Gas Pressure	mbar	35-50
Oil Capacity	L	5
Absorbed Air Discharge	m ³ /dk.	3
Disposal Air	m ³ /san	2
	m ³ /dk.	8
	mm - ss	1200
	° C	491
Emitted Heat	"	13


Manufacturer	Mecc Alte	
	ECO 32-2S/4	
	"	60
Cos fi	1	
	3	
	400/230	
5_ia	A	86

	"	"	"	"
	850	2200	1100	1300
	"	"	"	"
	4	3110	1060	1750

AGM 60

GM
Mecc Alte
D+&''

● D+&''

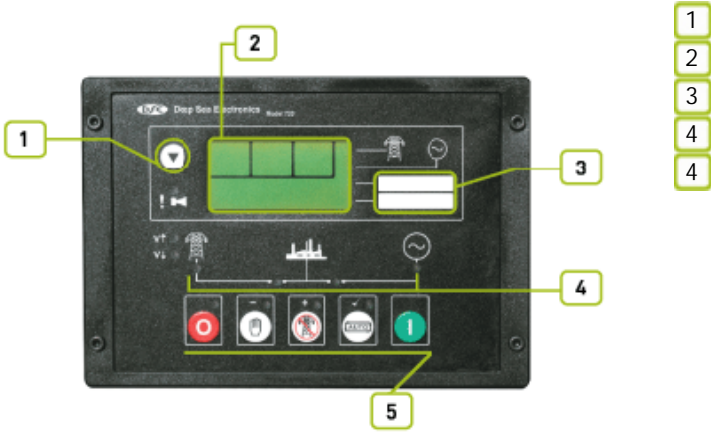

● Devices

8G9Ž +&\$Ž) 5Ž&&\$#(\$

● Structure And Paint

● Montage

● Generator Control Unit

8G9+&\$ 8G9+&\$ fi
) \$ ž
8G9+ &\$ ž

fi ž fi %\$\$
ž ž ž ž
ž ž ž ž

AGM 60

GM
Mecc Alte
D+&''

Indicator

f@BŁ
f@%&!@Ł
f@%z@BŁ

Protection

#

Optional Properties

Standards

#

6G'9B* '\$-) '\$

6G'9B* '%\$ \$!'&

6G'9B* '%\$ \$!'(

Electronic Charge Equipment

GA 8) z z !%& "


%, !&* \$ " %&\$) z z z

z z z

AGM 60

GM
Mecc Alte
D+&T

5GA 5000

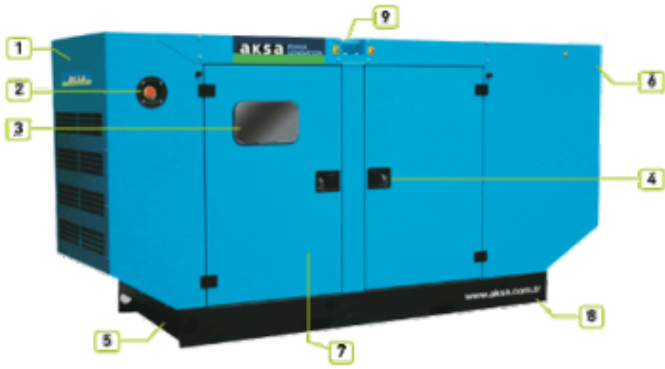

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

1

fj !&+) 7

ž

ž

1

ž

ž

ž

ž

		ASM 5.
	mm.	1060
	mm.	3110
	mm.	1750